


LRMDD - BRONZE SAE-430B/C86300 COM LUBRIFICAÇÃO SÓLIDA

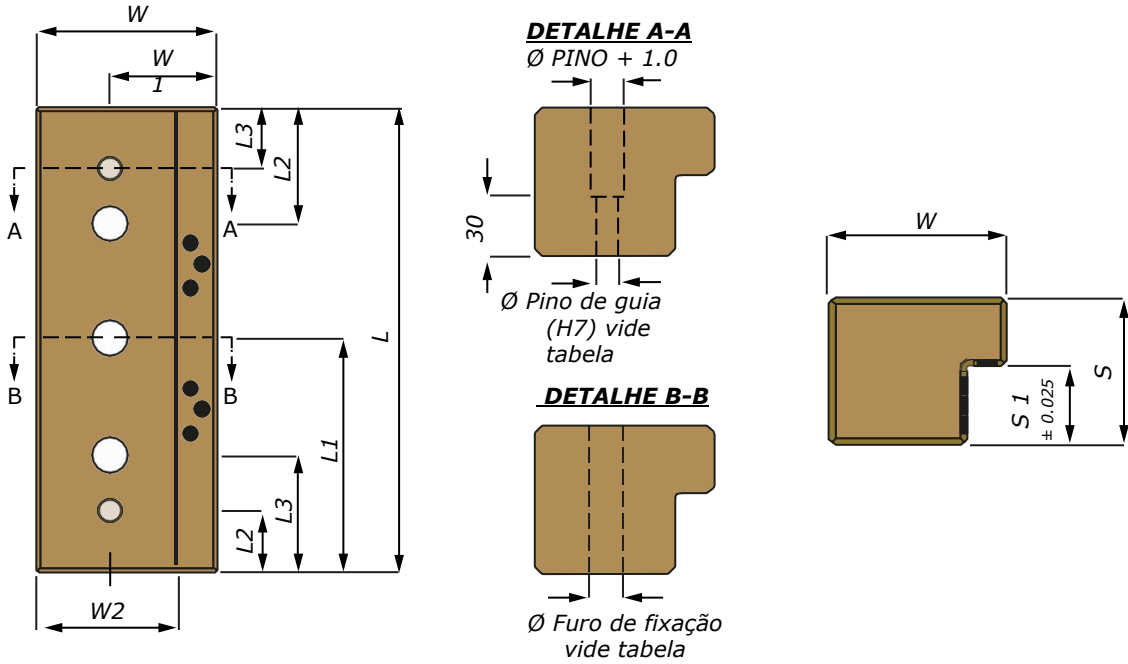

LRMDD	W	L	S	W1	W2 ± 0.025	L1	L2	L3	S1	FURO FIXAÇÃO		PINO GUIA	
										Ø	QT.	Ø	QT.
45100	45	100	50,5	30	30	-	27,5	10	45	14	2	10	2
45160		160											
55100	55	100	50,5	35	37	-	27,5	10	45	14	2	10	
55160		160											
70160	70	160	75,5	40	50	-	35	12,5	55,5	18	2	12	
70200		200				3							
70250		250				5							
70400		400											
85160	85	160	90,5	47	63	-	42,5	15	65,5	25	2	16	
85200		200				3							
85250		250				5							
85400		400											
100160	100	160	101	55	75	-	45	15	75,5	26	2	16	
100200		200				3							
100250		250				125							