


LCPL – AÇO 55/59 HRC COM LUBRIFICAÇÃO SÓLIDA

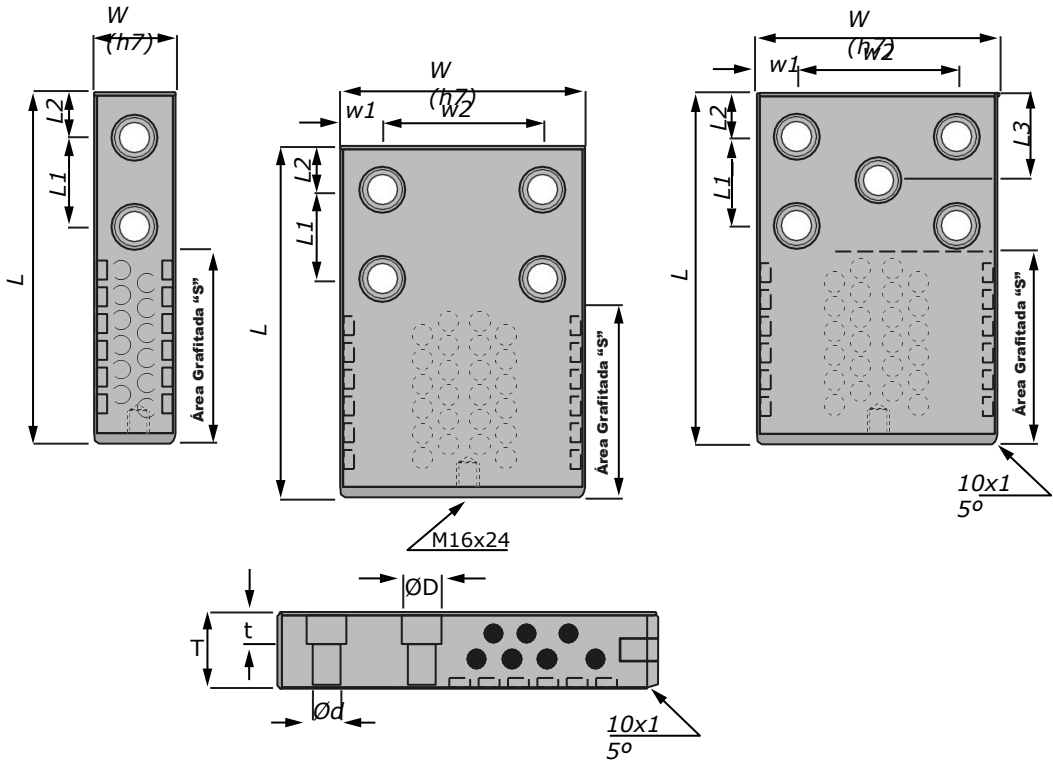

LCPL	W	L	h7	L1	L2	L3	w1	w2	ØD	Ød	T	t	S	
50160	50	160	0 -0,025	50	20	-	-	-	26	18	30	18	60	
50200		200		120										
50260		260		80										
70230	70	230	0 -0,030	60	25	-	-	-	26	18	35	18	100	
70260		260		160										
70300		300		75										
70350		350		150										
100230	100	230	0 -0,035	60	30	-	20	60	32	22	45	22	100	
100280		280		160										
100330		330		100										
100390		390		120									200	
120230		120		230									0 -0,035	60
120280	280		160											
120330	330		100											
120390	390		120	20										
150280	150		280	0 -0,040	60	30	-	30	90	32	22	50		22
150330		330	80		190									
150390		390	140											
150430		430	180											
180280		180	280		0 -0,040								60	
180330	330		80	70		190								
180390	390		140	100										
180430	430		180	120										
180480	480		200	130		200								
180550	550		225	142,5		250								