
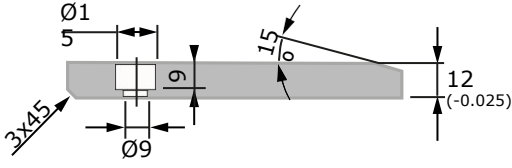
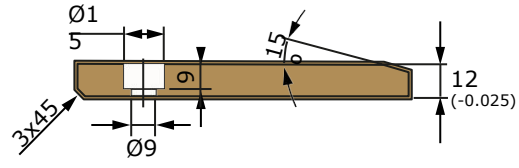
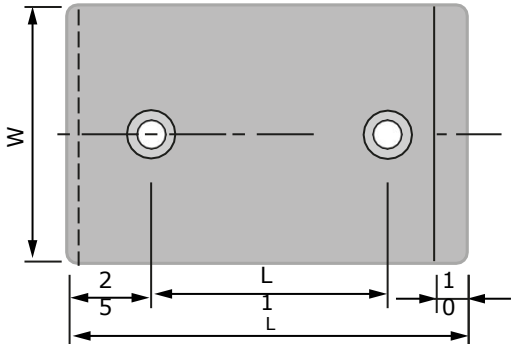


LWPF – BRONZE SAE-430B/C86300 COM LUBRIFICAÇÃO SÓLIDA
LSPF – AÇO 55/59 HRC SEM LUBRIFICAÇÃO SÓLIDA

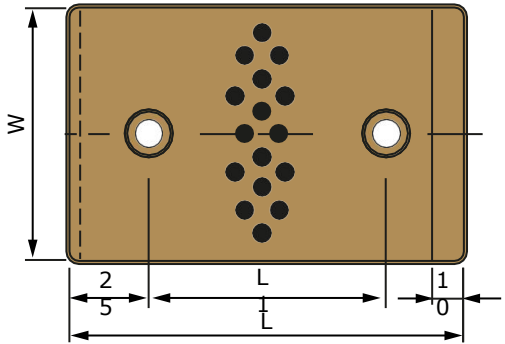

LWPF	LSPF	W (-0,2)	L (-0,2)	L1 (±0,2)
3080	3080	30	80	30
30100	30100		100	50
30125	30125		125	75
30160	30160		160	110
30200	30200		200	150
4080	4080	40	80	30
40100	40100		100	50
40125	40125		125	75
40160	40160		160	110
40200	40200		200	150
5080	5080	50	80	30
50100	50100		100	50
50125	50125		125	75
50160	50160		160	110
50200	50200		200	150
6080	6080	60	80	30
60100	60100		100	50
60125	60125		125	75
60160	60160		160	110
60200	60200		200	150
8080	8080	80	80	30
80100	80100		100	50
80125	80125		125	75
80160	80160		160	110
80200	80200		200	150